

Location: \_\_\_\_\_




**MH-301, 401,  
501, 601-WM-EXT**

**SIPHONIC ROOF DRAIN  
OVERFLOW WITH EXTENDED  
OUTLET**

**Specification:** MIFAB® Specification: MIFAB® / Hydromax Series MH-301, 401, 501, 601-WM-EXT (specify outlet connection size) lacquered cast iron siphonic roof drain with wide anchor flange, cast iron waterproofing membrane clamp ring, ductile iron air baffle / inducer with Type 304 stainless steel allen key hardware and extended outlet connection.

**Function:** Used in any type of roofs as a siphonic roof drain system. The extended outlet is typically used to connect to a hub and spigot outlet.

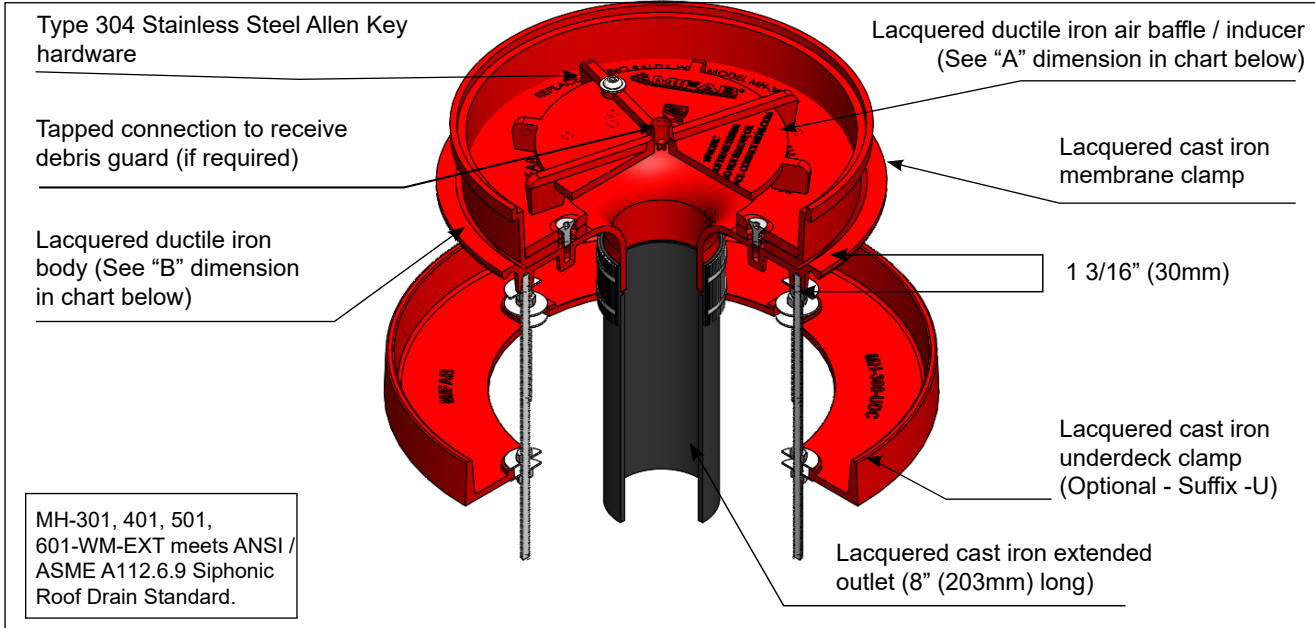

MODEL NUMBER	PIPE SIZE	BODY HEIGHT NO HUB (STANDARD)	PERFORMANCE AND DIMENSION INFORMATION				
			Resistance Value (K)	Minimum Flow Rate (GPM)	Maximum Flow Rate (GPM)	"A" Air Baffle / Inducer Diameter	"B" Body Diameter
MH-301-WM-EXT	3" (76)	11 1/8" (289)	0.12	23.00	415.00	8.86" (225.11)	13" (330)
MH-401-WM-EXT	4" (102)	11 1/2" (292)	0.08	75.00	750.00	12.19" (309.73)	19 3/8" (492)
MH-501-WM-EXT	5" (125)	12 3/8" (314)	0.04	120.00	1,300.00	14.62" (371.45)	19 3/8" (492)
MH-601-WM-EXT	6" (152)	12 3/4" (324)	0.04	160.00	1,800.00	17.87" (454)	25 1/4" (640)

Suffix	Description
-11	Acid resistant epoxy coated body
-12A	Galvanized body and membrane clamp
-13	Galvanized body, membrane clamp and dome
-B	Sump receiver
-BA	Buy American Act Compliant product
-E	Adjustable Extension
-G	Stainless steel ballast guard
-M	Debris Guard
-PA	Pennsylvania Steel Act compliant product
-U	Underdeck clamp

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: \_\_\_\_\_ Page No: \_\_\_\_\_  
 Section No: \_\_\_\_\_ Contractor: \_\_\_\_\_  
 Schedule No: \_\_\_\_\_ Purchase Order No: \_\_\_\_\_