

Location: \_\_\_\_\_




**MH-501-28**

**SIPHONIC ROOF DRAIN OVERFLOW**

**Specification:** MIFAB® / Hydromax Series MH-501-28 stainless steel siphonic roof drain with small anchor flange for gutter installation, ductile iron air baffle / inducer with Type 304 stainless steel allen key hardware.

**Function:** Used in any type of roofs as a siphonic roof drain overflow system. The siphonic overflow roof drain is designed to accept water once the main siphonic roof drain is clogged or overwhelmed.

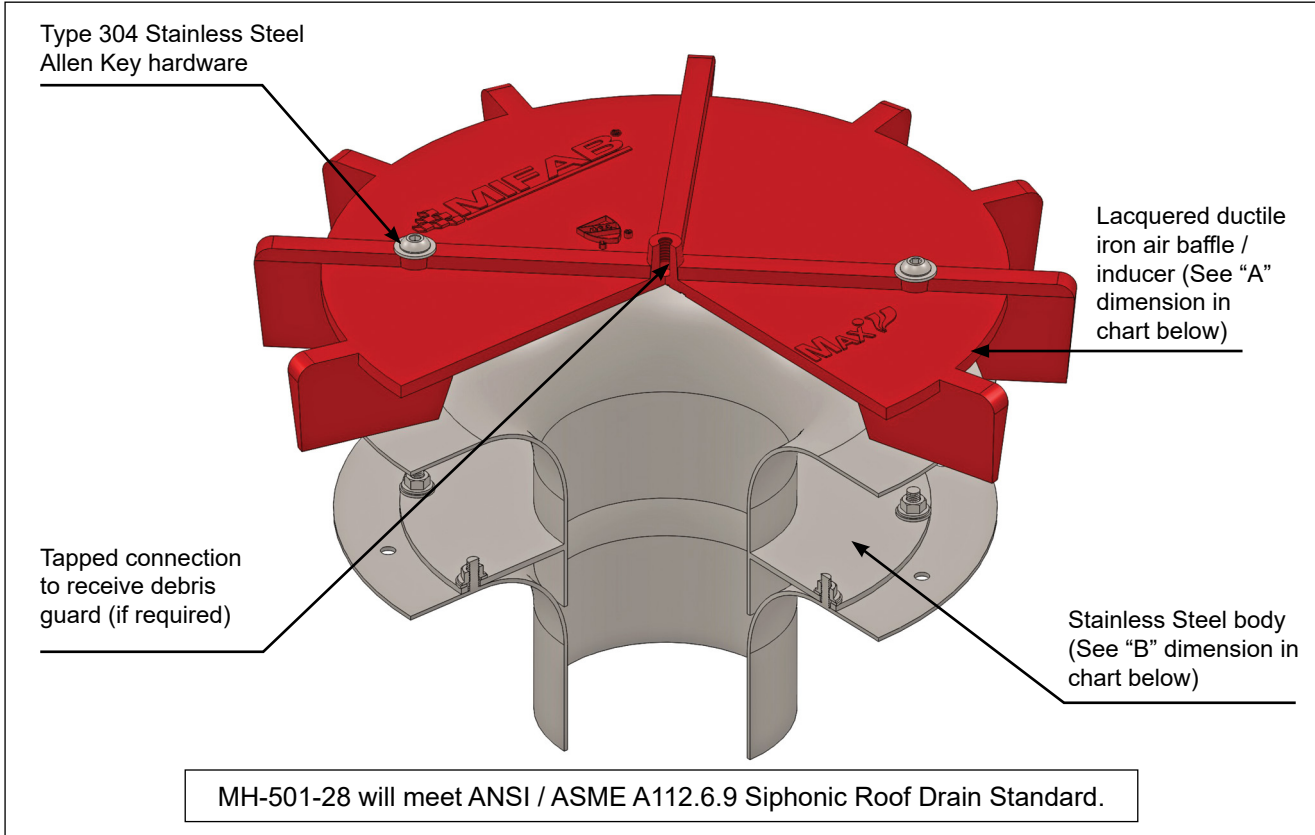

MODEL NUMBER	PIPE SIZE	BODY HEIGHT NO HUB (STANDARD)	PERFORMANCE AND DIMENSION INFORMATION			
			Minimum Flow Rate (GPM)	Maximum Flow Rate (GPM)	"A" Air Baffle / Inducer Diameter	"B" Body Diameter
MH-501-28	5" (125)	4 3/8" (110)	120.00	1,300.00	14.62" (371.45)	11.8" (300)

SUFFIX	OPTIONAL VARIATIONS:
-BA	Sump receiver (A8-BP)
-G	Stainless steel ballast guard
-M	Debris Guard
-PA	Pennsylvania Steel Act compliant product

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: \_\_\_\_\_ Page No: \_\_\_\_\_  
 Section No: \_\_\_\_\_ Contract: \_\_\_\_\_  
 Schedule No: \_\_\_\_\_ Purchase Order No: \_\_\_\_\_