

Location: _____




**MH-301, 401,
501, 601**

**SIPHONIC ROOF DRAIN
WITH 2" OVERFLOW**

Specification: MIFAB® / Hydromax Series MH-301, 401, 501, 601 (specify outlet connection size) lacquered cast iron siphonic roof drain with wide anchor flange, cast iron waterproofing membrane clamp ring with integral 2" water dam and ductile iron air baffle / inducer with Type 304 stainless steel allen key hardware.

Function: Used in any type of roofs as a siphonic roof drain overflow system. The siphonic overflow roof drain is designed to accept water once the main siphonic roof drain is clogged or overwhelmed.

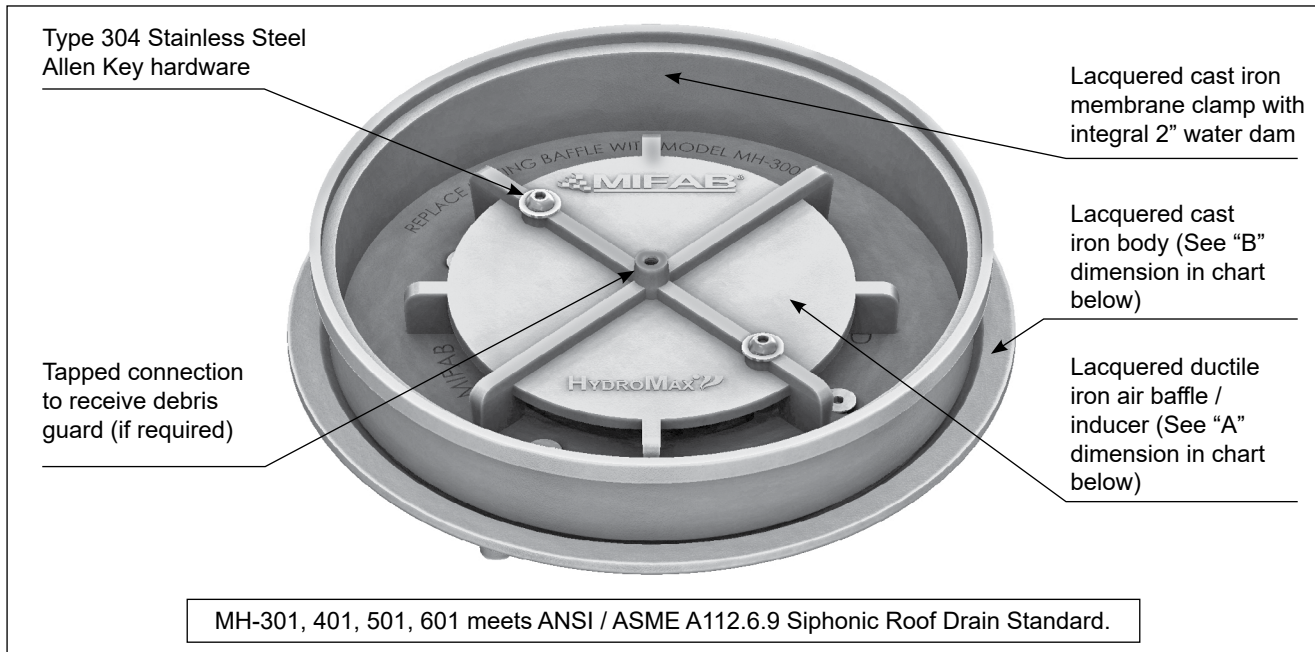

MODEL NUMBER	PIPE SIZE	BODY HEIGHT NO HUB (STANDARD)	PERFORMANCE AND DIMENSION INFORMATION				
			Resistance Value (K)	Minimum Flow Rate (GPM)	Maximum Flow Rate (GPM)	"A" Air Baffle / Inducer Diameter	"B" Body Diameter
MH-301	3" (76)	3 1/8" (79)	0.095	23.00	400.00	7 1/4" (185)	13" (330)
MH-401	4" (102)	3 1/2" (90)	0.12	75.00	790.00	10 5/8" (271)	19 3/8" (492)
MH-501	5" (125)	4 3/8" (110)	0.11	120.00	1,260.00	12 1/4" (310)	19 3/8" (492)
MH-601	6" (152)	4 3/4" (120)	0.14	160.00	1,890.00	15 1/2" (395)	25 1/4" (640)

SUFFIX OPTIONAL VARIATIONS:

- 11 Acid resistant epoxy coated body
- 12A Galvanized body and membrane clamp
- 13 Galvanized body, membrane clamp and dome
- B Sump receiver
- BA Buy American Act Compliant product
- C Secondary clamp

SUFFIX OPTIONAL VARIATIONS:

- E Adjustable extension
- G Stainless steel ballast guard
- DG Debris Guard
- PA Pennsylvania Steel Act compliant product
- U Underdeck clamp

Job Name:
Section No:
Schedule No:

Page No:
Contract:
Purchase Order No: